




## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup> : <b>H01R 9/09</b>	<b>A1</b>	(11) International Publication Number: <b>WO 96/24175</b> (43) International Publication Date: <b>8 August 1996 (08.08.96)</b>
(21) International Application Number: <b>PCT/US96/01048</b> (22) International Filing Date: <b>30 January 1996 (30.01.96)</b> (30) Priority Data: 7-034518                      31 January 1995 (31.01.95)                      JP (71) Applicant (for all designated States except US): <b>THE WHITAKER CORPORATION [US/US]; Suite 450, 4550 New Linden Hill Road, Wilmington, DE 19808 (US).</b> (72) Inventors; and (75) Inventors/Applicants (for US only): <b>TAKENAKA, Noriaki [JP/JP]; 3-5-8, Hisamoto, Takatsu-ku, Kawasaki-shi, Kanagawa 133 (JP). KUROKAWA, Noriharu [JP/JP]; 3-5-8, Hisamoto, Takatsu-ku, Kawasaki-shi, Kanagawa 228 (JP). SASAKI, Takinori [JP/JP]; 3-5-8, Hisamoto, Takatsu-ku, Kawasaki-shi, Kanagawa 257 (JP).</b> (74) Agents: <b>NELSON, Katherine, A. et al.; The Whitaker Corporation, Suite 450, 4550 New Linden Hill Road, Wilmington, DE 19808 (US).</b>		(81) Designated States: <b>BR, CA, CN, CZ, HU, KR, MX, PL, SG, US, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).</b>  <b>Published</b> <i>With international search report.</i>

(54) Title: PRESS-FIT CONNECTING PIN AND ELECTRONIC DEVICE USING THE SAME

## (57) Abstract

The present invention is directed to a small-size press-fit connecting pin which can be press-fitted and connected in the through-hole of a circuit board by means of a low insertion force, and an electronic device using this press-fit connecting pin. The press-fit connecting pin (10) has a shaft portion with a diameter of approximately 0.4 mm, and has a first section (42) and second section (43) (along the length of the shaft portion) whose length is less than the thickness of the circuit board (100) in which the through-hole (101) is formed. Projecting strips (45, 46) which run in the direction of length are formed on the outer surfaces of the respective sections (42 and 43). The projecting strips (45 and 46) formed on the first section (42) and second section (43) are formed in mutually different angular positions.

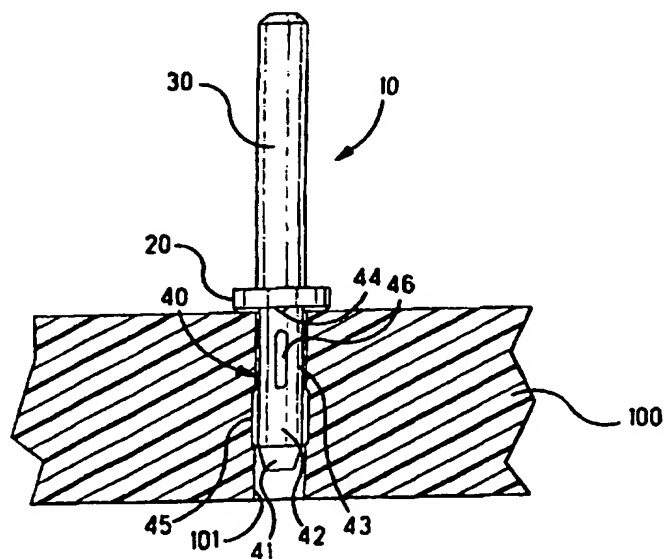

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgyzstan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	KZ	Kazakhstan	SG	Singapore
CH	Switzerland	LI	Liechtenstein	SI	Slovenia
CI	Côte d'Ivoire	LK	Sri Lanka	SK	Slovakia
CM	Cameroon	LR	Liberia	SN	Senegal
CN	China	LT	Lithuania	SZ	Swaziland
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	LV	Latvia	TG	Togo
DE	Germany	MC	Monaco	TJ	Tajikistan
DK	Denmark	MD	Republic of Moldova	TT	Trinidad and Tobago
EE	Estonia	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	UG	Uganda
FI	Finland	MN	Mongolia	US	United States of America
FR	France	MR	Mauritania	UZ	Uzbekistan
GA	Gabon			VN	Viet Nam

PRESS-FIT CONNECTING PIN AND  
ELECTRONIC DEVICE USING THE SAME

5           The present invention concerns a pin which is  
press-fitted and connected to electrical terminals,  
especially plated through-holes, and electronic devices  
such as pin grid arrays (PGA's), IC devices and  
electrical connectors or the like which use such a  
10   press-fit connecting pin.

Electronic circuit parts which are attached to  
circuit boards during use, such as PGA's, IC devices,  
electrical connectors, switches and the like (hereafter  
referred to collectively as "electronic devices"), have  
15   numerous terminals or pins. Such pins are connected to  
conductive pads or conductive paths of circuit boards  
during use.

In the case of such electronic devices, the number  
of pins has increased, and the pins have been installed  
20   at a higher density (smaller pitch), as the size of  
electronic equipment has been reduced and the  
performance of such equipment has been improved.  
Soldering is a common technique used to effect electrical  
connection of such numerous high-density pins to circuit  
25   boards. In the case of high-density pins, however, not  
only is soldering difficult, but a drop in reliability  
caused by solder bridges or the like also becomes a  
problem. Furthermore, it is extremely difficult to  
remove electronic devices once these devices have been  
30   soldered. Accordingly, such soldered devices are  
difficult to maintain and service.

In order to overcome such drawbacks of soldering,  
direct electrical connections achieved by press-fitting  
pins into circuit boards which have plated through-holes  
35   have been proposed. Such techniques have spread widely,  
especially in the field of communications equipment.

A compliant pin terminal known as the ACTION PIN®  
terminal has been commercially marketed by AMP

Incorporated as one type of such press-fit connecting pin. This compliant pin is constructed so that portions of the shaft of the pin are sheared in the axial direction and mutually offset along the shear surfaces, as disclosed, for example, in U.S. Patent No. 4,186,982. Accordingly, this pin can be press-fitted relatively smoothly against the inside walls of plate through-holes, so that highly reliable electrical connections can be achieved and maintained with a large contact pressure, and without damaging the plating layer. A similar compliant pin is also disclosed in Japanese Utility Model Application Kokai No. 58-14683, and a pin split into three parts is disclosed in Japanese Utility Model Application Kokai No. 60-45463 and elsewhere.

On the other hand, compliant pins or press-fit pins which have been given a deformable cross-sectional shape by applying pressure or mechanical working without shearing the shaft portion of the pin are disclosed in Japanese Patent Application Kokai No. 62-5575, Japanese Utility Model Application Kokai No. 58-154572, Japanese Utility Model Application Kokai No. 60-172370, Japanese Utility Model Application Kokai No. 58-157974, Japanese Utility Model Application Kokai No. 58-172881 and elsewhere.

The conventional compliant pins described above are sufficient for certain specified applications, but are difficult or impossible to use in the case of small-size high-density pins with extremely slender shafts, such as those having a diameter of approximately 0.4 mm, which are required by recent electronic devices. The reasons for this are as follows:

First, in the case of compliant pins in which the shaft portion is sheared or offset so that the shaft portion is split into two or three parts as described above, such working cannot be applied to fine pins which have a diameter of approximately 0.4 mm.

Furthermore, when conventional compliant pins which have been worked so that the cross-sectional shape of the pin is deformable are used in through-holes that have a diameter of approximately 0.4 mm, the amount of deformation is small so that an excessive amount of force insertion force is required for press-fitting. As a result, the pins themselves undergo buckling deformation. Furthermore, the plating layers of the through-holes may be destroyed, or, depending on the dimensional working tolerances of the through-holes and pins, it may be impossible to obtain electrical connections of sufficiently high reliability.

Accordingly, one object of the present invention is to provide a press-fit connecting pin [a] which can be press-fitted relatively easily in through-holes that have a relatively large dimensional tolerance, [b] which makes it possible to achieve a highly reliable electrical connection, and [c] which can be used in the case of small-size high-density pins.

Another object of the present invention is to provide an electronic device which has numerous small-size high-density press-fit connecting pins, and which has press-fit connecting pins with a low insertion force and a high degree of reliability.

In order to eliminate the above mentioned drawbacks of conventional press-fit connecting pins and achieve the above mentioned technical objects, the press-fit connecting pin of the present invention is characterized by the fact that deformable projecting strips which project in a radial configuration are formed in mutually different angular positions at a plurality of different points on the shaft portion of the pin. Furthermore, the press-fit connecting pin of the present invention is characterized by the fact that the pin has a substantially circular shaft portion. The shaft portion has substantially parallel surfaces which are located on opposite sides of the axis of the shaft portion formed

thereon. Radial projecting strips are formed on the central portions of the parallel surfaces. which project beyond the circumference of the round shaft portion.

Furthermore, the electronic device of the present invention is characterized by the fact that the device uses numerous press-fit connecting pins having the construction described above, so that highly reliable electrical connections with plated through-holes formed in circuit boards can be achieved by means of a relatively low insertion force.

Preferred embodiments of the press-fit connecting pin of the present invention and an electronic device using the same will be described in detail with reference to the attached figures:

FIGURE 1 is a front view which shows the overall construction of a preferred embodiment of the press-fit connecting pin of the present invention, and the connection of this pin to a circuit board.

FIGURE 2 is a cross sectional view of one example of the press-fit connecting portion of the press-fit connecting pin shown in Figure 1.

FIGURE 3 is a cross sectional view which shows the press-fit connecting pin of Figures 1 and 2 press-fitted in the through-hole of a circuit board.

FIGURE 4 is a cross-sectional view of a first alternative embodiment of the press-fit connecting portion of the pin.

FIGURE 5 is a cross-sectional view of a second alternative embodiment of the press-fit connecting portion of the pin.

FIGURE 6 is a cross-sectional view of a third alternative embodiment of the press-fit connecting portion of the pin.

FIGURE 7 is a cross-sectional view of a fourth alternative embodiment of the press-fit connecting portion of the pin.

FIGURE 8 is a front view of the electronic device of the present invention.

FIGURE 9 is a bottom view of the device of Figure 8.

5

First, the overall construction of a press-fit connecting pin constituting a preferred embodiment of the present invention will be described with reference to Figure 1. Figure 1 is a side view of a press-fit connecting pin 10. This press-fit connecting pin 10 is preferably made of a copper alloy such as zirconium-copper or the like, or other electrically conductive alloy such one sold under the trade name of KOVAR®. The overall shape of the pin is substantially cylindrical. The pin 10 has a large-diameter flange portion 20 located roughly midway along the pin; furthermore, the pin 10 has a substantially uniform cylindrical portion 30 on one side of the flange portion 20, and a press-fit connecting portion 40, which is press-fitted into a plated through-hole 101 formed in a circuit board 100, on the other side of the flange portion 20. In this specific embodiment, the thickness of the circuit board 100 is approximately 2.0 mm, and the internal diameter of the through-hole 101 is  $0.45 \pm 0.05$  mm. The overall length of the press-fit connecting pin 10 is 4.8 mm, the length and diameter of the cylindrical portion 30 are 3.1 mm and 0.45 mm, respectively, the diameter of the flange portion 20 is 0.9 mm, and the length of the press-fit connecting portion 40 is 1.7 mm. Of course, it should be noted that these dimensions and shapes may be appropriately selected in accordance with the intended use of the pin.

Next, the press-fit connecting portion 40 which constitutes the essential part of the press-fit connecting pin 10 of the present invention will be described. The press-fit connecting portion 40 in this specific embodiment has [a] a tapered end section 41,

[b] a first section 42 and second section 43 which form a continuation of the end section 41, each having a length of approximately 0.6 mm, and if necessary, [c] (e.g.) four radial ribs 44 which are formed on the  
5 press-fit connecting portion side of the flange portion 20.

The first section 42 and second section 43 of the press-fit connecting portion 40 have substantially the same shape, and each of these portions has (e.g.) two  
10 projecting strips 45 or 46 formed on the outer circumference of the pin. The respective projecting strips 45 and 46 of the first section 42 and second section 43 are formed in mutually different angular positions; for example, the projecting strips 45 and 46  
15 in Figure 1 are formed in a perpendicular relationship.

One example of the first section 42 of the press-fit connecting portion 40 of the press-fit connecting pin 10 is shown in cross-section in Figure 2. This first section 42 in this example has [a] a main body or  
20 shaft portion 50 which has circular-arc-formed sections 51, 52 separated by a diameter of approximately 0.4 mm and parallel surfaces 53, 54 separated by a distance of 0.2 mm, and [b] projections 55, 56 which are formed at the approximate centers of the two parallel surfaces 53, 54, and which extend outward in a substantially  
25 perpendicular direction (i.e. radially) from these parallel surfaces 53, 54. The projections 55, 56 are formed from base parts 55a, 56a which have a width of 0.1 mm, and deformable parts 55b, 56b which have a width  
30 of approximately 0.05 mm, and which extend outward from the tips of the base parts 55a, 56a (these deformable parts are hereafter referred to as "projecting strips", since these parts correspond to the projecting strips 45, 46 in Figure 1). The tips of the base parts 55a, 56a are positioned on the circumference of a circle  
35 having a diameter of approximately 0.4 mm, which is an inner circle having the same diameter as the circle



formed by the circular-arc-form parts 51, 52 of the main body part 50. Furthermore, the tips of the projecting strips 55b, 56b are positioned on the circumference of an outer circle with a diameter of approximately 0.56 mm, which is centered on the axial center of the main body portion 50.

Next, the press-fit connecting pin 10 shown in Figures 1 and 2 will be described with reference to the cross-sectional view shown in Figure 3, which illustrates the press-fitting of the pin 10 in the through-hole 101 of the circuit board 100. Furthermore, in Figure 3, the first section 42 is indicated by a solid line and the second section 43 is indicated by a broken line, thus illustrating the positional relationship of the two sections. Furthermore, the dimensions and shapes of the through-hole 101 in the circuit board 100 and the respective sections of the press-fit connecting portion 40 of the press-fit connecting pin 10 are assumed to be as in the example described above.

As is seen from Figure 3, the inner circle (0.4 mm) formed by the two circular-arc-form parts 51, 52 of the main body part 50 is smaller than the diameter (center value: 0.45mm) of the through-hole 101; accordingly, the main body portion 40 can be inserted without making substantial contact with the inside walls of the through-hole 101. However, since the tips of the projecting strips 55b, 56b are positioned on the circumference of the outer circle described above, which has a diameter of 0.56 mm, the projecting strips 55b, 56b contact the inside walls of the through-hole 101 and are deformed. The amount of deformation depends on the dimensional relationship with the through-hole 101. Furthermore, since the second section 43 of the press-fit connecting portion 40 is in a perpendicular relationship with the first section 42, the projecting strips 45, of the second portion 42 also contact the

inside walls of the through-hole 101 and are deformed.

It should be noted here that since the projecting strips of the press-fit connecting pin 10 are deformable, even if the plating layer of the through-hole 101 should be scraped by the projecting strips 45, 46, this scraping will occur in only a portion of the total length of the plating layer; furthermore, since the projecting strips 45, 46 of the first section 42 and second section 43 are mutually offset, there is no danger of damage to the through-hole 101 (i.e., no danger of a loss of conductivity). Furthermore, it should also be noted that since the projecting strips 45, 46 have a width of approximately 0.05 mm as described above, the insertion force required for the insertion of the press-fit connecting pin 10 into the through-hole 101 can be kept at a sufficiently low value.

As best seen in Figure 1, the flange portion 20 of the press-fit connecting pin 10 forms a stop surface with which the pin 10 engages the surface of the circuit board 100. Furthermore, the radial ribs 44 on the outside surface of the flange portion 20 provide gas escape paths when the pin 10 is soldered to the circuit board 100 by surface mount techniques (SMT) (i.e., reflow soldering), so that a good electrical connection is achieved. However, the radial ribs 44 are not an essential part of the present invention, and may be omitted depending on the intended use of the pin 10.

The projecting strips 45, 46 of the press-fit connecting pin 10 shown in Figures 1 and 2 are formed radially with respect to the axial center of the main body part 50; accordingly, these projecting strips 45, 46 undergo little deformation during press-fitting in the through-hole 101 of the circuit board 100, and bite into the inside walls of the through-hole 101 as knife edges. However, the projecting strips 45, 46 are not necessarily limited to projecting strips that extend

radially, i.e., in directions perpendicular to the parallel surfaces 53, 54. Alternative embodiments of the projecting strips 45, 46 will be described with reference to Figures 4 through 7.

5 In the alternative embodiments 142, 242 shown in Figures 4 and 5, the dimensions and shapes of the main body part 150, 250 and base parts 55a, 56a are the same as those of the corresponding parts shown in Figure 2. However, these examples are characterized by the fact  
10 that the projecting strips 45, 46 (not shown) are inclined at specified angles from the radial direction, so that the overall cross-sectional shape of the projecting strips is roughly an "f" shape. Specifically, the projecting strips shown in Figure 4  
15 have an angle of inclination of approximately 45 degrees with respect to the radial direction, while the projecting strips shown in 5 are inclined at roughly 90 degrees (i.e., are parallel to the parallel surfaces 53, 54). In both of these alternative embodiments 142, 242  
20 the tips of the projecting strips are positioned on the circumference of an outer circle with a diameter of 0.56 mm as in the case of the projecting strips in Figure 2. It should be noted that the projecting strips in both of these modified examples deform relatively easily, and  
25 that when the pin 10 is press-fitted into The through-hole 101 of the circuit board 100, the tips of the projecting strips receive a force that bends the tips inwardly from the circumference of the outer circle along the inside walls of the through-hole 101.  
30 Accordingly, the following advantages are obtained: i.e., the insertion force required in order to insert the press-fit connecting pin 10 into the through-hole 101 is small, so that there is little damage to the plating layer on the inside walls of the through-hole  
35 101; furthermore, a good electrical connection can be obtained with plating layers which show variation as a result of the dimensional tolerance.

Next, the alternative embodiments 342, 442 illustrated in Figures 6 and 7 have dimensions and shapes that are slightly different from those of the embodiments of Figures 4 and 5 described above. Here, the circular-arc-form surfaces 51', 52' of the main body part 350, 450 are positioned on the circumference of an inner circle which has a diameter of 0.42 mm, and the distance between the parallel surfaces 53', 54' is 0.3 mm.

10 In the press-fit connecting pin shown in Figure 6 the base parts are formed on the central portions of the parallel surfaces 53', 54', and the tips of these base parts are positioned on the circumference of the inner circle described above. Projecting strips 45 are formed  
15 radially in the center of the tip of each base part; however, a semicircular cut-out 45a (e.g., with a radius of approximately 0.015 mm) is formed in the root portion on the right side of each projecting strip 45. As a  
20 result of the formation of such cut-outs 45a, a force which causes the projecting strips 45 to bend toward the side in which the cut-out 45a is formed, i.e., to bend in the clockwise direction as shown in these figures, acts on the projecting strips 45 when the pin 10 is  
25 press-fitted in the through-hole 101. Accordingly, an effect similar to that obtained in Figures 4 and 5 may be expected.

The embodiment shown in Figure 7 is similar to the embodiment shown in Figure 6 however, this embodiment differs from the embodiment shown in Figure 6 in that  
30 the base parts 55a, 56a are offset to one side (i.e., the opposite side from the side in which the cut-out 45a is formed). As a result of this shape, the projecting strips 45 have room or space to incline even further in the clockwise direction. Accordingly, the projecting  
35 strips 45 can be sufficiently bent even in the case of a relatively small-diameter through-hole 101, so that press-fitting and connection can be accomplished

relatively smoothly without any great damage to the through-hole 101.

The press-fit connection pin 10 of the present invention was described above in detail along with  
5 various examples of alternative embodiments. However, the present invention is not limited to such embodiments alone; it goes without saying that various modifications and alterations may be made in accordance with intended uses without departing from the spirit of  
10 the present invention.

An electronic device using the press-fit connecting pin 10 of the present invention will be briefly described with reference to Figures 8 and 9. Figure 8 is a side view of the electronic device 200, and Figure  
15 9 is a bottom view of the same. The electronic device 200 shown here as an example, is a device which is commonly known as a "P-PGA" (plastic pin grid array). In this electronic device 200, various types of semiconductor integrated circuits (IC's) and the like  
20 are installed and connected on the surface of a plastic substrate, and the overall device is sealed with a plastic material (e.g., an epoxy resin). Numerous press-fit connecting pins 10 are disposed in a matrix form on the bottom surface of the main body 201 of the  
25 electronic device 200.

The respective press-fit connecting pins 10 may be any of the pins described above with reference to Figures 1 through 7. The cylindrical portions 30 of the pins 10 are connected by welding or the like to  
30 conductive pads on the plastic substrate, so that the pins 10 are electrically connected to specified circuits of the various IC's described above. In the case of an electronic device 200 which thus has numerous interconnected pins, it is extremely desirable to use  
35 press-fit connecting pins 10 in order to facilitate attachment and connection to the circuit board, and for other reasons. In the past, such a need or requirement

existed, but no electronic device capable of realizing such connections had been concretely proposed. By using the press-fit connecting pins 10 described above, it has become possible for the first time to realize such  
5 connections. Furthermore, it is desirable that the press-fit connecting pins 10 be made of a good conductor of electricity and heat, such as a copper alloy or the like.

As is seen from the above description, the use of  
10 the press-fit connecting pin of the present invention makes it possible, as a result of the special construction of the pin to insert the pin into the through-hole of a circuit board by means of a low insertion force, so that damage to the plating layer on  
15 the inside walls of the through-hole can be alleviated. Furthermore, a sufficiently reliable electrical connection with the through-hole can also be obtained. Furthermore, the pin of the present invention can also be used in cases where the through-holes involved have a  
20 relatively large dimensional tolerance (e.g.,  $\pm 0.05$  mm). Accordingly, the present invention has the conspicuous practical merit of making it possible to connect electronic devices with large numbers of pins installed at a high density to circuit boards.

25

Claims:

1. A press-fit connecting pin which is press-fitted in a plated through-hole formed in a circuit board, and which has a long, slender shaft portion that  
5 is electrically connected, said press-fit connecting pin being characterized in that:

deformable projecting strips which project in a substantially radial configuration are formed in mutually different angular positions at a plurality of  
10 mutually separated points on said shaft portion, and said projecting strips are formed so that they can contact the inside walls of said through-hole.

2. A press-fit connecting pin which is press-fitted in a plated through-hole formed in a circuit  
15 board, and which has a substantially round shaft portion that is electrically connected, said press-fit connecting pin being characterized in that:

two sides of said shaft portion centered on the axis of said shaft portion are formed as substantially  
20 parallel surfaces, and projecting strips which project in a radial configuration are formed at the approximate centers of said parallel surfaces.

3. An electronic device which has a plurality of press-fit connecting pins that are press-fitted and  
25 connected in plated through-holes, said electronic device being characterized in that:

said press-fit connecting pins have the construction described in Claim 1.

4. An electronic device which has a plurality of  
30 press-fit connecting pins that are press-fitted and connected in plated through-holes, said electronic device being characterized in that:

said press-fit connecting pins have the construction described in Claim 2.

35

1/3

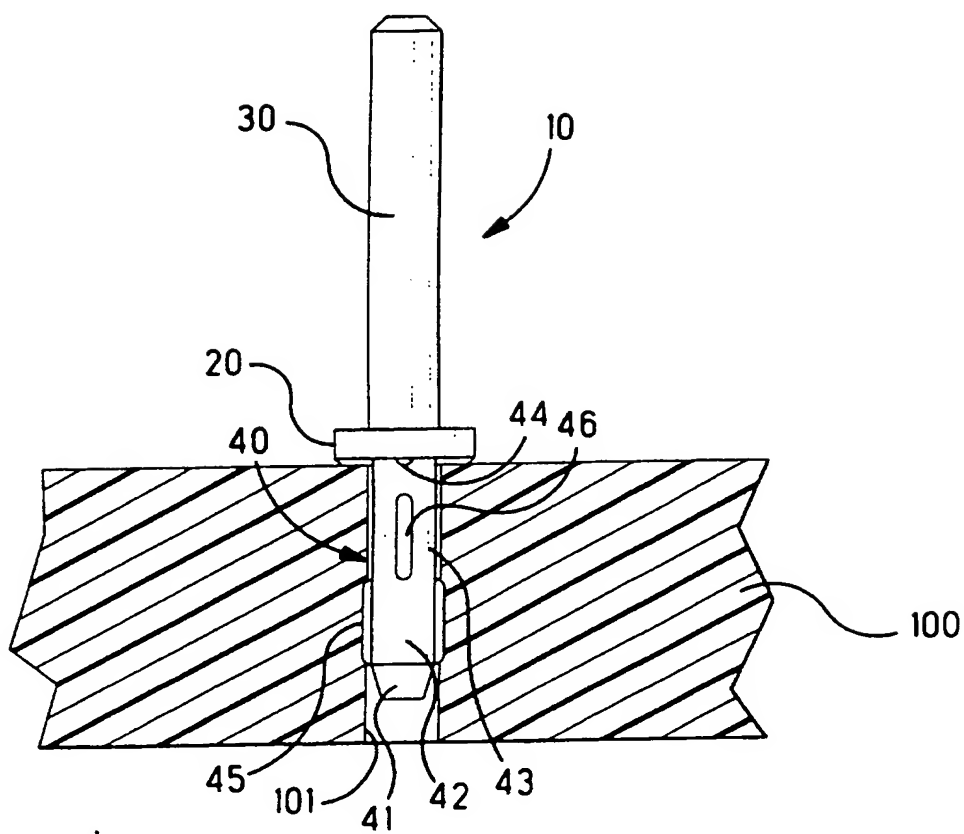


Fig. 1

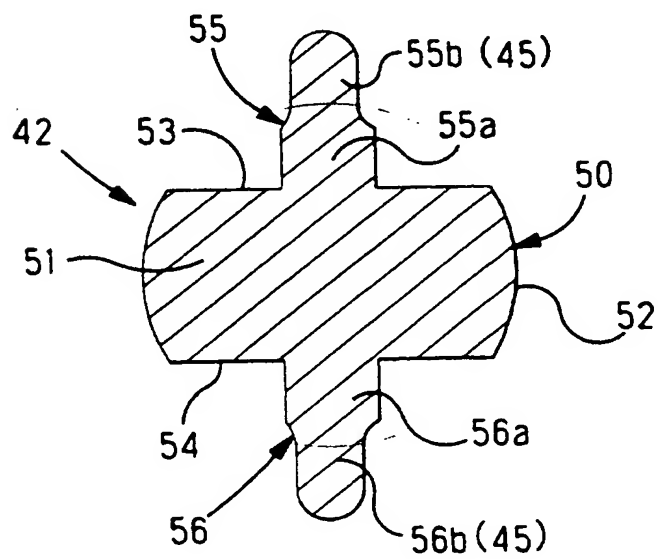


Fig. 2



Fig. 3

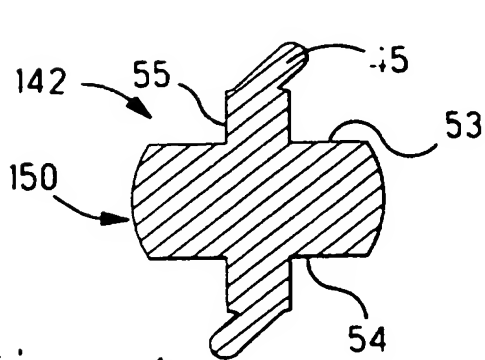
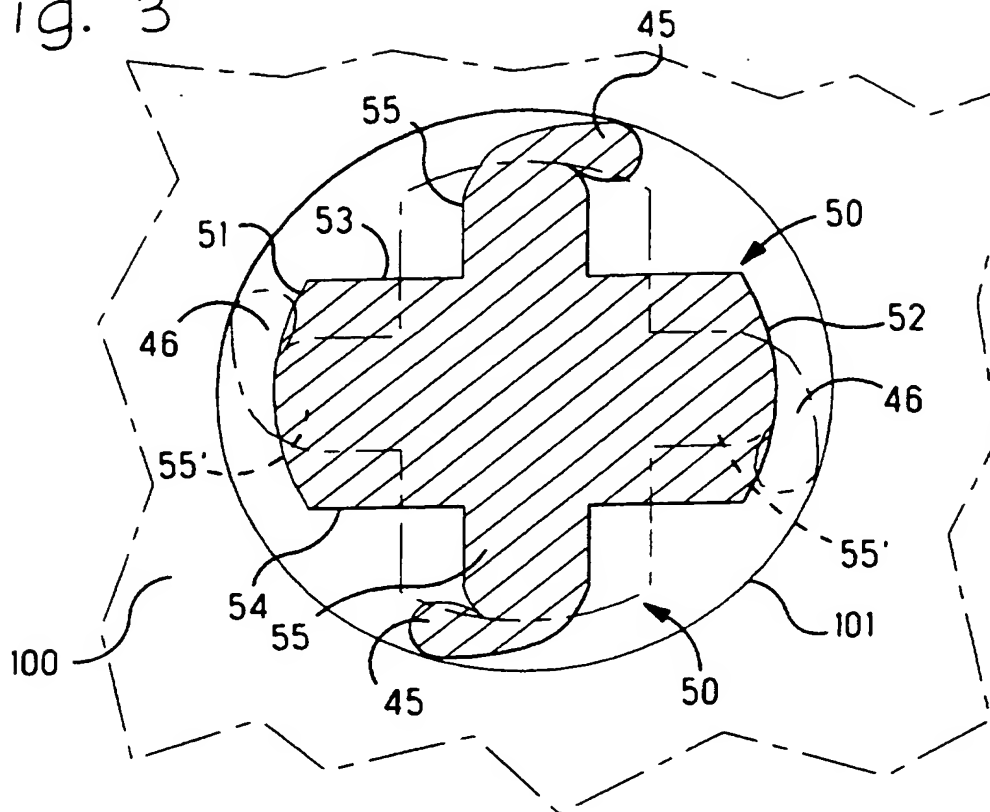


Fig. 4

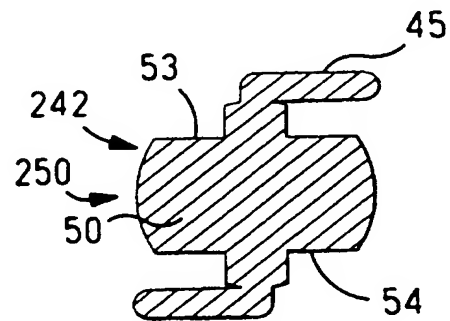


Fig. 5

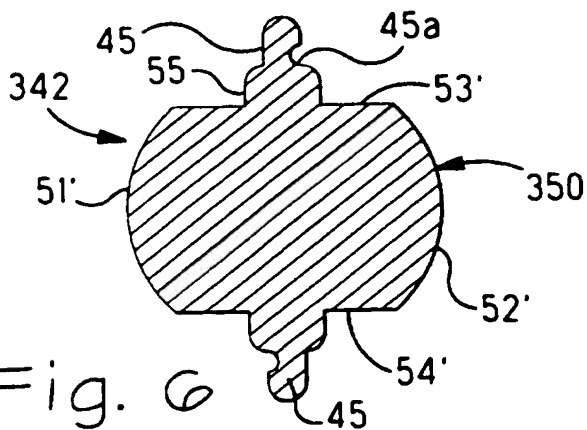


Fig. 6

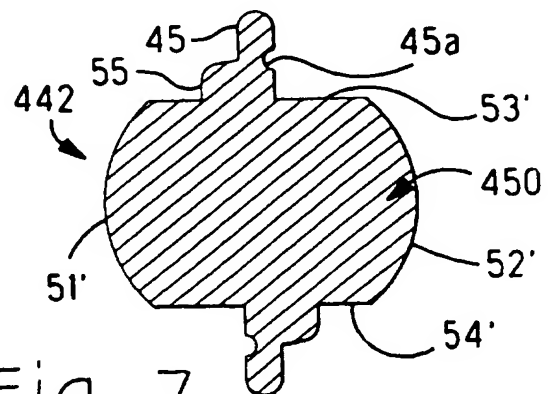


Fig. 7

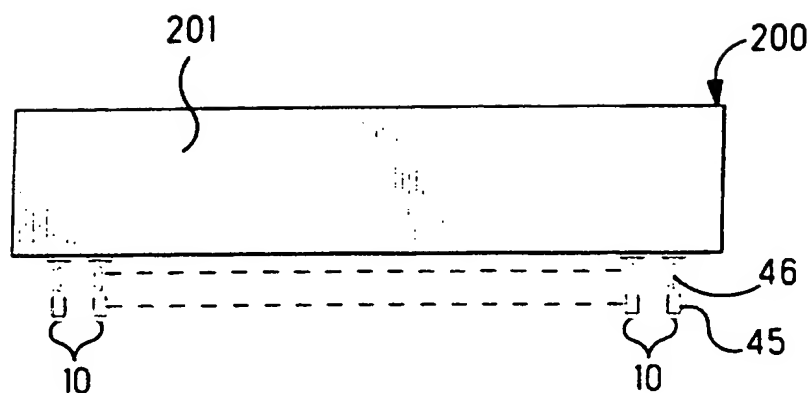


Fig. 8

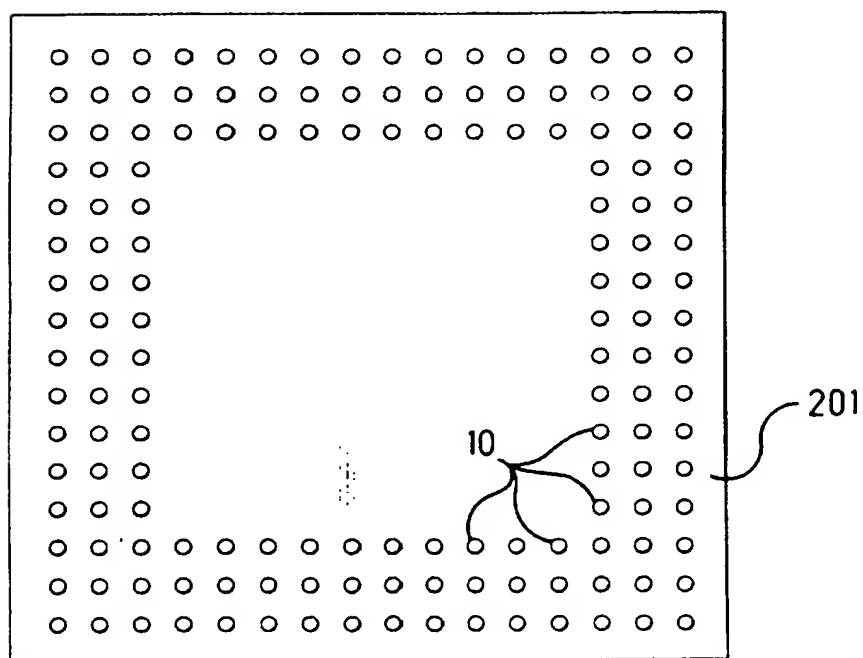


Fig. 9

# INTERNATIONAL SEARCH REPORT

International Application No  
PCT/US 96/01048

A. CLASSIFICATION OF SUBJECT MATTER  
IPC 6 H01R9/09

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)  
IPC 6 H01R

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US,A,3 827 004 (VANDEN HEUVEL ET AL.) 30 July 1974 see column 1, line 47 - column 2, line 11; figures 4,8	1,3
A	US,A,5 002 507 (SITZLER) 26 March 1991 see column 4, line 37 - line 53; figure 1	1,3
A	EP,A,0 340 574 (CDM CONNECTORS DEVELOPMENT AND MANUFACTURE A.G.) 8 November 1989 see column 4, line 6 - column 5, line 11; figures 3-5	1-4
A	FR,A,966 327 (SERTILLANGE) 6 October 1950 see page 2, left-hand column, line 3 - line 21 see page 2, left-hand column, line 34 - line 42; figures 7,11,12	1-4
	-/--	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

### \* Special categories of cited documents:

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
- \*Z\* document member of the same patent family

Date of the actual completion of the international search

15 May 1996

Date of mailing of the international search report

24.05.96

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+ 31-70) 340-2040, Tx. 31 651 epo nl,  
Fax (+ 31-70) 340-3016

Authorized officer

Kohler, J

# INTERNATIONAL SEARCH REPORT

Int:      onal Application No  
PCT/US 96/01048

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>US,A,3 444 617 (STRICKER ET AL.) 20 May 1969 see figures 6,7</p> <p style="text-align: center;">-----</p>	1,3

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 96/01048

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US-A-3827004	30-07-74	DE-A- 2323616 GB-A- 1426264 NL-A- 7206313	15-11-73 25-02-76 13-11-73
US-A-5002507	26-03-91	NONE	
EP-A-0340574	08-11-89	CH-A- 675929 US-A- 4936797	15-11-90 26-06-90
FR-A-966327	06-10-50	NONE	
US-A-3444617	20-05-69	NONE	